

# 2026 TECHNICAL CATALOG

## AUTOMOTIVE LED LIGHTING

Headlights | Bi-LED Projectors | Signal Bulbs

**Global Wholesale Supply**  
**OEM / ODM Solutions**

**Hainan SeaPeak Trading Co.,Ltd. | SeaPeak®**



**ENGINEERED FOR GLOBAL AFTERMARKETS**

# COMPANY PROFILE

Hainan SeaPeak Trading Co.,Ltd. (Brand: SeaPeak®) specializes in international trade and wholesale supply of automotive LED lighting products.

Established in 2020 and registered in Hainan, China, the company operates across Zhuhai and Zhongshan and works with manufacturing partners in Guangdong.

We serve global distributors, importers and OEM/ODM customers with LED headlights (H4/H7/H11 and more), Bi-LED projector lenses, signal bulbs and HID replacement solutions.

**Website** [seapeak.asia](http://seapeak.asia)  
**Email** [support@seapeak.asia](mailto:support@seapeak.asia)



**GLOBAL WHOLESALE | RELIABLE DELIVERY | PROJECT  
CUSTOMIZATION**

# WHAT WE DO

**Sellable. Installable. Serviceable.**

---

We are not simply a parameter supplier. From LED chips and beam patterns to thermal management, drivers, packaging and delivery schedules, we treat real wholesale usability as the core product standard.

**01**

## **BEAM PATTERN**

Optical performance, cut-off quality and market suitability.

**02**

## **THERMAL MANAGEMENT**

Fan, heat-pipe and housing solutions for sustained brightness.

**03**

## **DRIVER & ELECTRONICS**

Stable power delivery, decoding and protection design.

**04**

## **PACKAGING & DELIVERY**

Wholesale packing, project customization and lead-time planning.

**Serving distributors and channel customers in the Middle East, Europe, Southeast Asia, Africa and other export markets.**

# QUALITY & COMPLIANCE


The original technical catalog presents selected compliance and management-system marks, including RBA, BSCI, IATF 16949, ISO 9001, ISO 14001, ISO 45001 and IPMS.

Certification requirements vary by product, destination market and order. Please specify the target country and required documentation in your RFQ.



**International  
Professional Certificate** ■

It has dozens of industry certification in world.

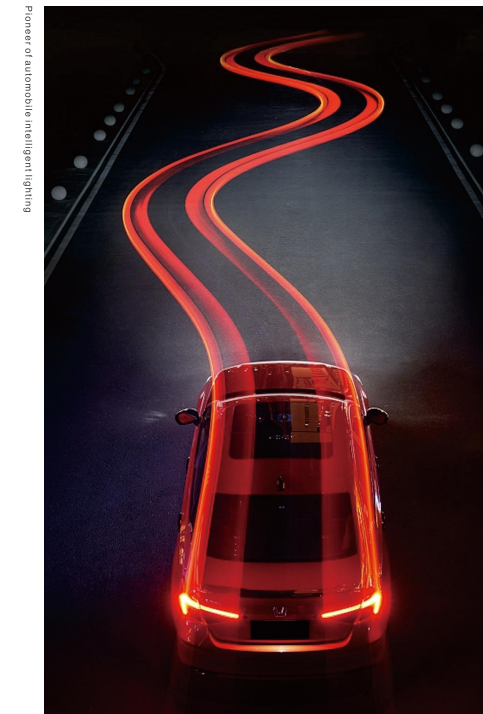

Pioneer of automobile intelligent lighting



# PRODUCT PORTFOLIO

Automotive lighting solutions for global wholesale selection



There are optional appearance colors

### Parameter


| Low Beam |          |           |                   |          |          |          |            |
|----------|----------|-----------|-------------------|----------|----------|----------|------------|
| Power    | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
| 55W      | DC12-24V | 2470LM    | IP20              | 7030     | 6000K    | ADC12    | >30,000hrs |

| High Beam |         |           |                   |          |          |          |          |
|-----------|---------|-----------|-------------------|----------|----------|----------|----------|
| Power     | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan |
|           |         |           |                   |          |          |          |          |

## BI-LED PROJECTORS

Cut-off control, LHD/RHD options and integrated high/low beam solutions.

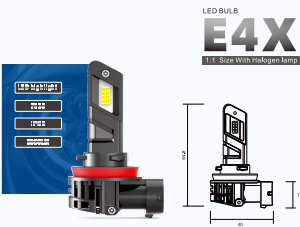

### Parameter

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 55W   | DC12-24V | 2470LM    | IP20              | 7030     | 6000K    | ADC12    | >30,000hrs |



## LED HEADLIGHT BULBS

H4, H7, H11, 9005, 9006 and other interfaces with multiple cooling architectures.



| Power/Power | LED Chip | Beam Type | Beam |
|-------------|----------|-----------|------|
| 55W/55W     | 7030     | High      | High |



## SIGNAL & READING BULBS

Compact replacement bulbs for reading, signal, brake and auxiliary-light applications.

Bi-LED Projector Lens Overview


Bi-LED Projector Lens ■

There is no boundary between light and darkness



21

LED BULB  
**L0160**  
LED projector lens(Die-Casting Model)

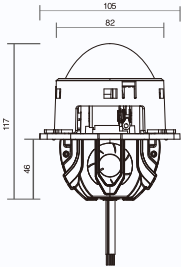

There are optional appearance colors



Parameter

| Low Beam  |          |           |                   |          |          |          |            |
|-----------|----------|-----------|-------------------|----------|----------|----------|------------|
| Power     | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
| 50W       | DC10-30V | 2470LM    | P20               | 7035     | 6000K    | ADC12    | >30,000hrs |
| High Beam |          |           |                   |          |          |          |            |
| Power     | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
| 80W       | DC10-30V | 3500LM    | P20               | 5050     | 6000K    | ADC12    | >30,000hrs |



High Beam




Low Beam



22

L0860 / L01060 Projector Series

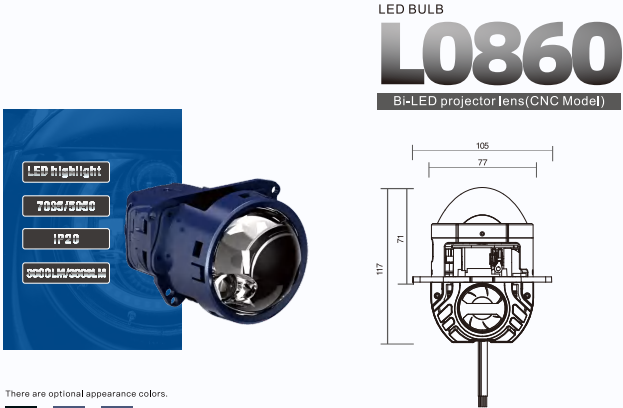


There are optional appearance colors.




Parameter

| Low Beam |          |           |                   |          |          |          |            |
|----------|----------|-----------|-------------------|----------|----------|----------|------------|
| Power    | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
| 50W      | DC10~30V | 2420LM    | IP20              | 7035     | 6200K    | 6063     | >30,000hrs |

| High Beam |          |           |                   |          |          |          |            |
|-----------|----------|-----------|-------------------|----------|----------|----------|------------|
| Power     | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
| 80W       | DC10~30V | 3300LM    | IP20              | 5050     | 6200K    | 6063     | >30,000hrs |



18

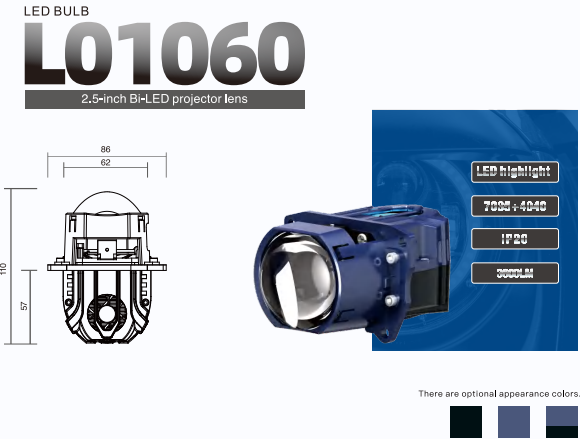

There are optional appearance colors.



Parameter

| Low Beam |          |           |                   |           |          |          |            |
|----------|----------|-----------|-------------------|-----------|----------|----------|------------|
| Power    | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip  | Color(K) | Material | Lifespan   |
| 50W      | DC10~30V | 3600LM    | IP20              | 7035+4040 | 5300K    | ADC12    | >30,000hrs |

| High Beam |          |           |                   |           |          |          |            |
|-----------|----------|-----------|-------------------|-----------|----------|----------|------------|
| Power     | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip  | Color(K) | Material | Lifespan   |
| 30W       | DC10~30V | 3600LM    | IP20              | 5050+4040 | 5300K    | ADC12    | >30,000hrs |



19


M3 Classical Plug-and-Play Series

Classic Models  
Of Automobile LED Lighting ■




There is no boundary between light and darkness.

LED BULB  
**M3**  
Classical Design, Plug and Play  
Same Size with Halogen Lamp




Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 25W   | DC9-32V | 4200LM    | IP65              | PMI-ZES  | 6500K    | ADC12    | >30,000hrs |

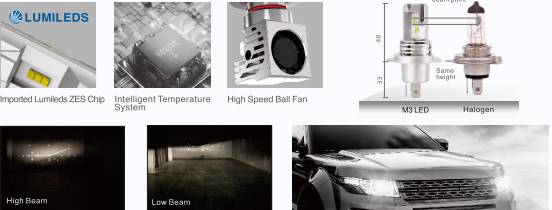


■ Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/9004/9005/9006/9007/9012/880/881

E4X / E4X H15 Series

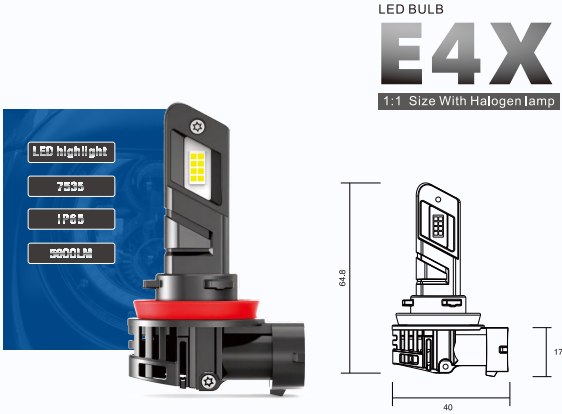

Parameter

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 26W   | DC11~18V | 5600LM    | IP65              | 7535     | 6500K    | ADC12    | >30,000hrs |




Model:H1/H3/H4/H7/H8/H9/H10/H11/H13/H15/H16/9004/9005/9006/9007/9012/880/881



Parameter


| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 24W   | DC9~32V | 4000LM    | IP65              | 7035     | 6500K    | ADC12    | >30,000hrs |

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 7W    | DC11~18V | 900LM     | IP65              | 2016     | 6500K    | ADC12    | >30,000hrs |




Model:H1/H3/H4/H7/H8/H9/H10/H11/H13/H15/H16/9004/9005/9006/9007/9012/880/881

M6X / M6 Fanless Series

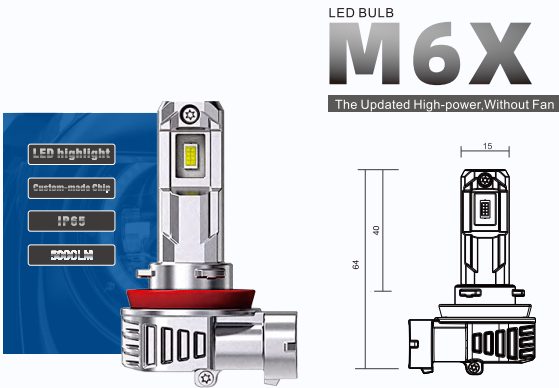

Parameter


| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 21W   | DC11-18V | 5000LM    | IP65              | 5530     | 6500K    | ADC12    | >30,000hrs |



Low Beam


High Beam

Model:H1/H3/H4/H7/H8/H9/H10/H11/H13/H15/H16/9004/9005/9006/9007/9012/880/881

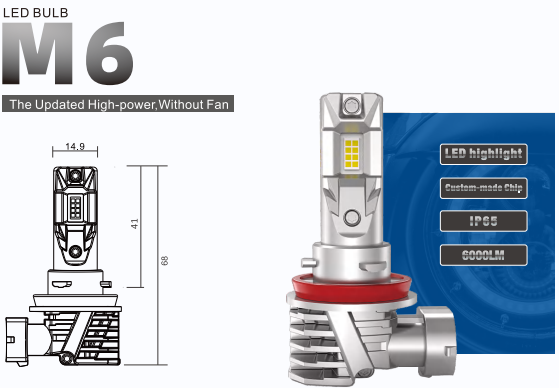

Parameter

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 27W   | DC11-18V | 6000LM    | IP65              | 7535     | 6500K    | ADC12    | >30,000hrs |




Low Beam

High Beam

Model:H1/H3/H4/H7/H8/H9/H10/H11/9005/9006/9007/9012





D1/D3 and D2/D4 Replacement Series

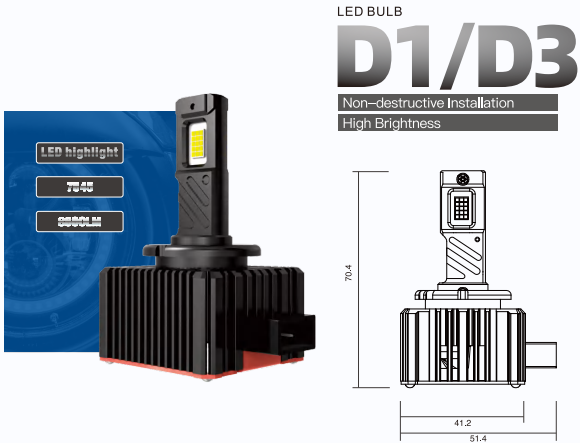


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 40W   | N/A     | 10000LM   | N/A               | 7545     | 6500K    | Al8063   | >30,000hrs |

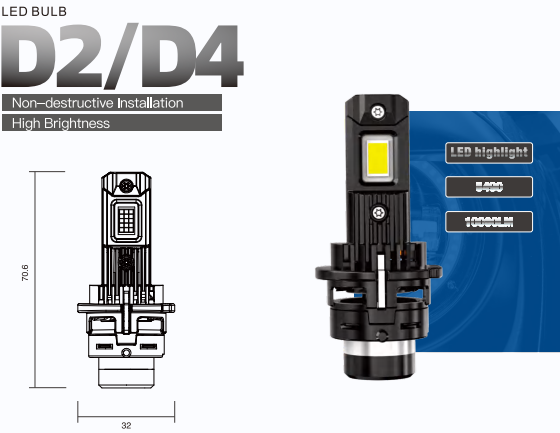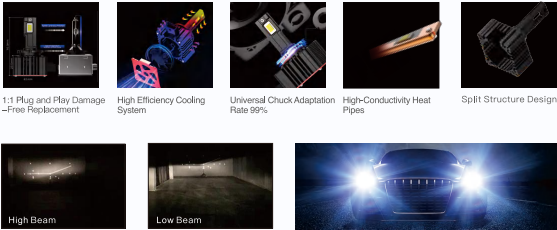

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 42W   | N/A     | 10000LM   | N/A               | 5490     | 6500     | ADC12    | >30,000hrs |

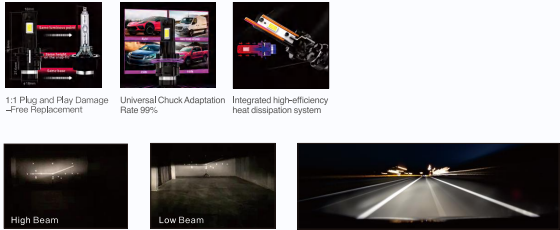


E4S H8 / E4S H7 Series




Parameter

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 40W   | DC11-18V | 7600LM    | IP65              | 7535     | 6500K    | ADC12    | >30,000hrs |



Model:H1/H3/H4/H7/H8/H16 (JP) /9005/9006/9012/

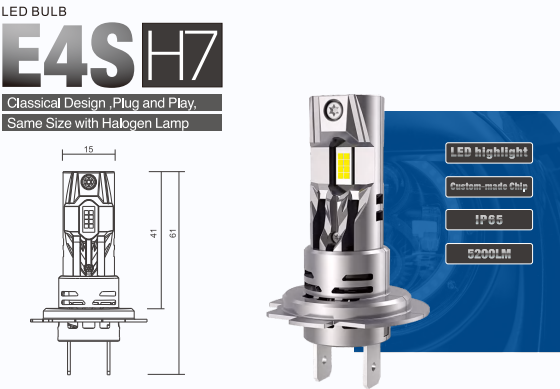

Parameter

| Power | Voltage  | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|----------|-----------|-------------------|----------|----------|----------|------------|
| 27W   | DC11-18V | 5200LM    | IP65              | 7035     | 6500K    | ADC12    | >30,000hrs |



Model:H1/H3/H4/H7/H8/H16(P)/9005/9006/9012

E5 / M5S High-Power Series

LED BULB


# E5

Plug and Play with High-Power



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 35W   | DC9-32V | 8000LM    | IP65              | 3570     | 6500K    | ADC12    | >30,000hrs |



Custom-made Chip



1:1 The same small size design as halogen lamp




A copper tube with 200 times improved thermal conductivity.



Noiseless Fan



Intelligent Temperature System



Low Beam



High Beam



White

■ Model: H4/H7/H8/H9/H10/9006/9012/H13/9004/9007

LED BULB

# M5S

Plug and Play with High-Power



Parameter


| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 45W   | DC9-32V | 8000LM    | IP65              | 7535     | 6500K    | ADC12    | >30,000hrs |



Custom-made Chip



1mm Ultra-thin Copper Substrate




A copper tube with 200 times improved thermal conductivity.



Intelligent Cooling System With Dual Ball Fan



Intelligent Temperature System



Low Beam



High Beam



White


■ Model: H4/H7/H8/H9/H10/H11/H13/9004/9005/9007/9012

M2 / X3 Series



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|------------------------|------------|
| 27W   | DC9-32V | 4200LM    | IP65              | 1860     | 6500K    | Aviation aluminum 6063 | >30,000hrs |




Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881




Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip            | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|---------------------|----------|------------------------|------------|
| 22W   | DC9-32V | 3400LM    | IP65              | Lumileds Luxeon ZES | 6500K    | Aviation aluminum 6063 | >30,000hrs |




Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881

MINI / P2 Series

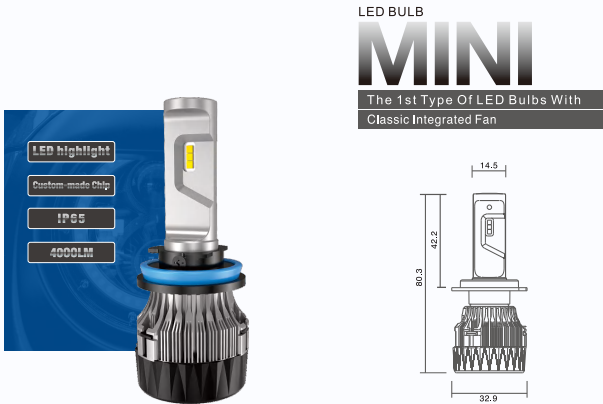


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|------------------------|------------|
| 30W   | DC9-32V | 4000LM    | IP65              | 1860     | 6500K    | Aviation Aluminum 6063 | >30,000hrs |

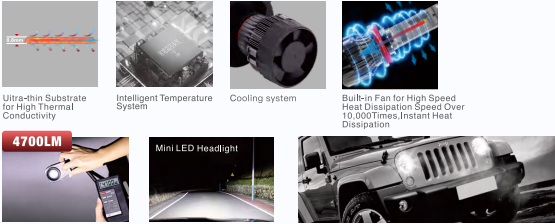


Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881

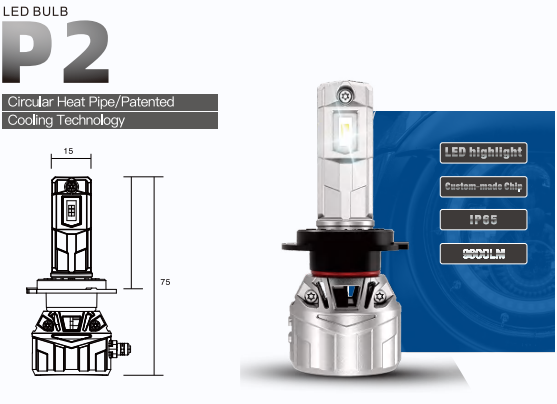


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 55W   | DC9-32V | 9600LM    | IP65              | GC7035   | 6500K    | ADC12    | >30,000hrs |

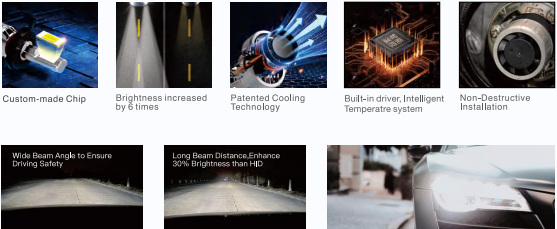



Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/9004/9005/9006/9007/880/881/P13/PSX26/PSX24

7HL / 5S Plus Series

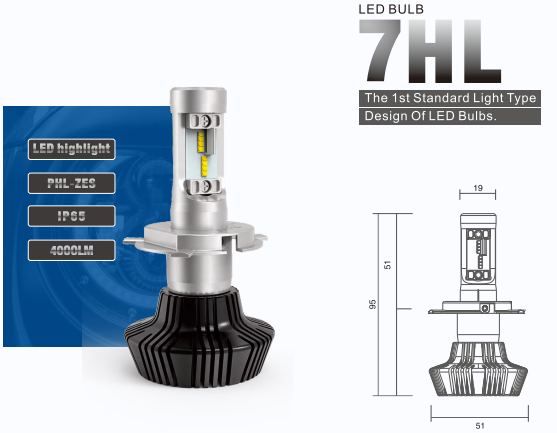


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip            | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|---------------------|----------|------------------------|------------|
| 20W   | DC9-32V | 4000LM    | IP65              | Lumileds luxeon ZES | 6500K    | Aviation aluminum 6063 | >30,000hrs |

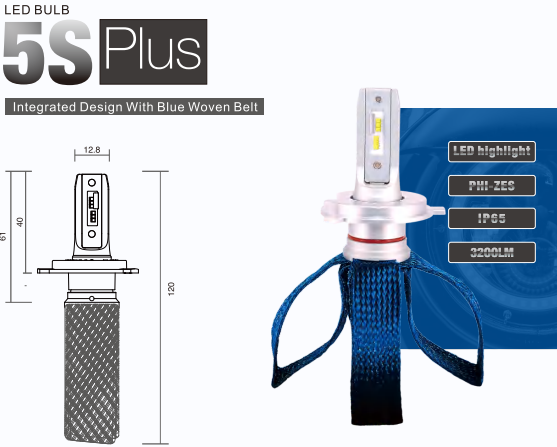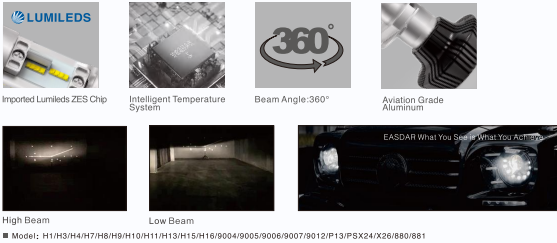


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip            | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|---------------------|----------|------------------------|------------|
| 19W   | DC9-32V | 3200LM    | IP65              | Lumileds luxeon ZES | 6500K    | Aviation aluminum 6063 | >30,000hrs |

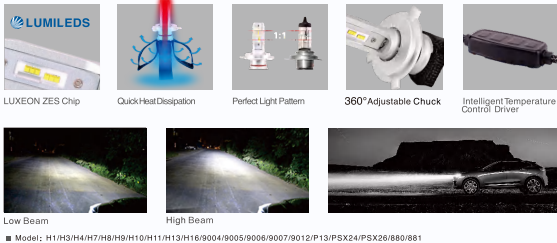

F5C / F6C Series

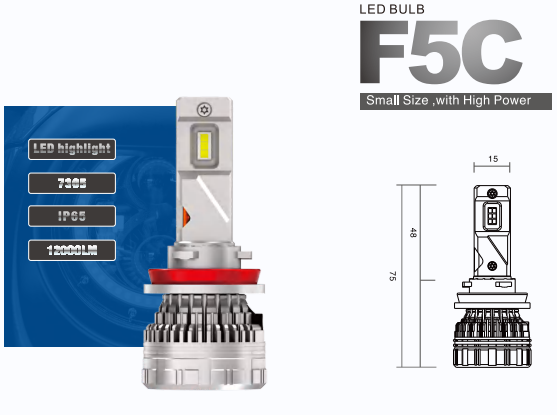

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material      | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|---------------|------------|
| 60W   | DC3~32V | 10000LM   | IP65              | 7035     | 6500K    | aluminum 6063 | >30,000hrs |



360° Adjustable  
Installation Chuck



Compact Heat Dissipation  
Structure Design



Efficient patented decoder



Silent Fan



High Beam



Low Beam



■ Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/EU/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material      | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|---------------|------------|
| 65W   | DC3~16V | 12000LM   | IP65              | 7035     | 6500K    | aluminum 6063 | >30,000hrs |



High power branded LED



Intelligent Temperature  
System



Efficient Patented Decoder




Silent and efficient fan



High Beam




Low Beam



■ Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/EU/H16L/P9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881




F8C / F9C Series

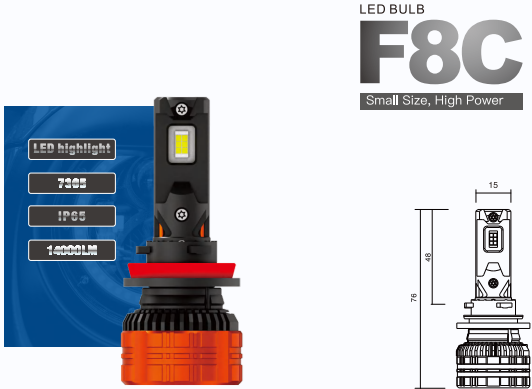


Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material      | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|---------------|------------|
| 80W   | DC9-32V | 14000LM   | IP65              | 7035     | 6500K    | aluminum 6063 | >30,000hrs |

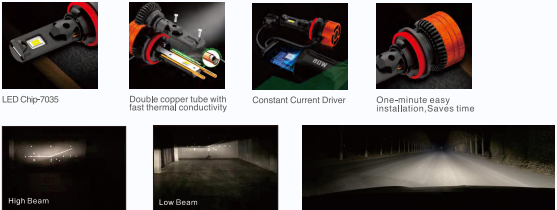


■ Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/EU/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881

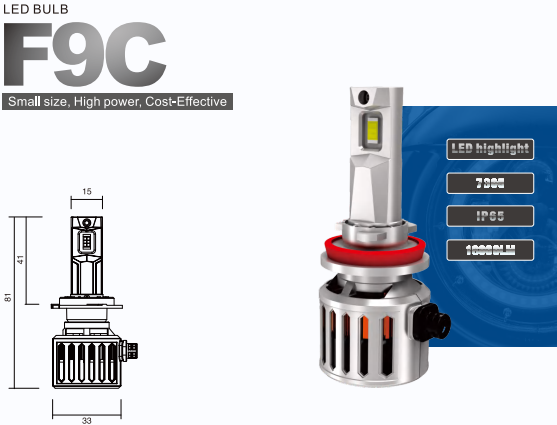

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 90W   | DC9-32V | 18000LM   | IP65              | 7035     | 6500K    | ADC12    | >30,000hrs |

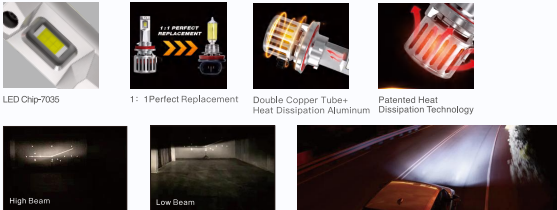

■ Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/EU/H16LP/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881

FG1 / FG2 Fog Light Series

LED Light

7545

1700


12000LM



LED BULB

FG1

L1B/LWSB, 1:1 Non-destructive Installation



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|----------|------------|
| 16W   | DC9-32V | 4200LM    | IP65              | 7535     | 6500K    | ADC12    | >30,000hrs |



Model: L1B/LWSB



LED Light

7545

1700


12000LM



LED BULB


FG2

LED Fog Light with Dual-Color



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K)    | Material | Lifespan   |
|-------|---------|-----------|-------------------|----------|-------------|----------|------------|
| 19W   | DC9-32V | 3200LM    | IP65              | 7535     | 6500K/3000K | ADC12    | >30,000hrs |

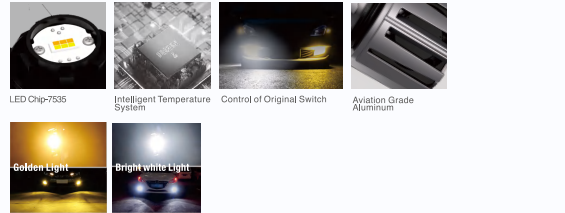

Model: L1B/LWSB



T03 / T02 / H4 Lens Solutions

LED highlight

7535+1860

IP65

7535+1860



T02



T03-H8

LED BULB

T03/02

Lens lamps used with reflection cups



T02




T03-H8

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip  | Color(K) | Material   | Lifespan   |
|-------|---------|-----------|-------------------|-----------|----------|------------|------------|
| 65W   | DC9-32V | 7000LM    | IP65              | 7535+1860 | 6500K    | ADC12+6063 | >30,000hrs |

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material   | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|------------|------------|
| 55W   | DC9-32V | 5000LM    | IP65              | 7035     | 6500K    | ADC12+6063 | >30,000hrs |




Model:H4/H7/H8/9005/9006/9012

LED BULB

H4

Classic Design With Lossless Lens.






Parameter

| Power | Voltage | Lumen(LM)         | Water Proof Grade | LED Chip         | Beam Angle | Usage      |
|-------|---------|-------------------|-------------------|------------------|------------|------------|
| 36W   | DC9-32V | L/3000LM,H/5600LM | IP65              | Custom-made Chip | 360°       | Head Light |




F2 / F3 Series

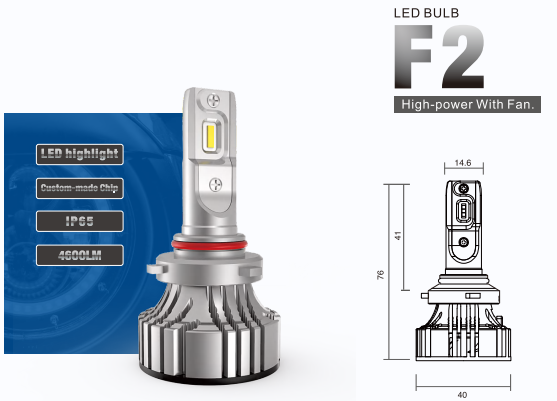

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|------------------------|------------|
| 32W   | DC9-32V | 4800LM    | IP65              | 1860     | 6500K    | Aviation aluminum 6063 | >30,000hrs |





Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H15/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|----------|----------|------------------------|------------|
| 45W   | DC9-32V | 8000LM    | IP65              | 7535     | 6500K    | Aviation aluminum 6063 | >30,000hrs |

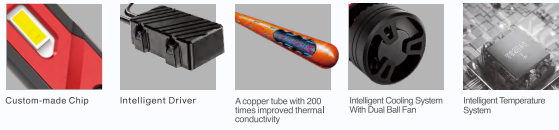

Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H15/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881

J1-CSP External Driver Series



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip      | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|---------------|----------|------------------------|------------|
| 20W   | DC9-32V | 3500LM    | IP65              | SEOUL CSP Y19 | 6500K    | Aviation aluminum 6063 | >30,000hrs |



Imported SEOUL Y19



Color Customization



Heat dissipation through the lamp body's aluminum components.



Ultra-thin Design: 2.5mm




Beam Angle: 360°



High Beam



Low Beam



EASDAR What You See is What You Achieve


Model: H1/H3/H4/H7/H8/H9/H10/H11/H13/H16/9004/9005/9006/9007/9012/P13/PSX24/PSX26/880/881



Signal and Reading Bulb Overview

Signal Or Reading Bulbs  
Of Automobile LED Lighting ■


There is no boundary between light and darkness



Parameter

| Power | Voltage  | Lumen(LM)/PCS | LED Chip | Beam Angle | Usage                    |
|-------|----------|---------------|----------|------------|--------------------------|
| 1.2W  | DC12-24V | 200LM         | PHI      | 110°       | Door Light/Reading Light |

Color



7G / 10G Signal Series



Parameter

| Power | Voltage  | Lumen(LM)/PCS | LED Chip | Beam Angle | Usage                     |
|-------|----------|---------------|----------|------------|---------------------------|
| 8W    | DC12-24V | 600LM         | 6PC-CREE | 360°       | Back-Up Light/Brake Light |

Color



■ Model: T20S/T20D/1156/1157/3156/3157/H1/H3/H4/H7/H8/H9/H10/H16(JP)/9005/9006/P13/PSX26/H16(EU) PSX24W



Parameter

| Power | Voltage  | Lumen(LM)/PCS | LED Chip            | Beam Angle | Usage                     |
|-------|----------|---------------|---------------------|------------|---------------------------|
| 8W    | DC12-24V | 700LM         | Lumileds luxeon ZES | 320°       | Back-Up Light/Brake Light |

Color



■ Model: T20S/T20D/1156/1157/3156/3157/H1/H3/H4/H7/H8/H9/H10/H16(JP)/9005/9006/P13/PSX26/H16(EU) PSX24W



S03 / S04 Series

LED highlight

2025 : 4218

IP65


3000lm



LED BULB

S03

25W High Power without Fan



LED highlight

2025 : 4218

IP65


3000lm



LED BULB

S04

360° Surrounding Glow without Dead Angle



Parameter

| Power | Voltage | Lumen(LM)/PCS | Water Proof Grade | LED Chip  | Material | Lifespan   |
|-------|---------|---------------|-------------------|-----------|----------|------------|
| 25W   | DC9-32V | 3000LM        | IP65              | 3030/2835 | ADC12    | >30,000hrs |



■1156/1157/3156/3157/T20S/T20D



Parameter


| Power | Voltage | Lumen(LM)/PCS | Water Proof Grade | LED Chip | Material | Lifespan   |
|-------|---------|---------------|-------------------|----------|----------|------------|
| 7W    | DC9-32V | 650LM         | IP65              | 2835     | ADC12    | >30,000hrs |



■1156/1157/3156/3157/T20S/T20D/T10/T15



## BRS / S05 Series

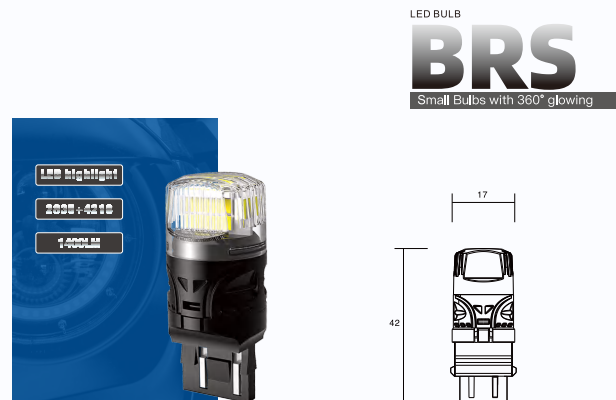


### Parameter

| Power | Voltage  | Lumen(LM)/PCS | Water Proof Grade | LED Chip | Material | Lifespan   |
|-------|----------|---------------|-------------------|----------|----------|------------|
| 7W    | DC11-18V | 680LM         | IP65              | 2835     | ADC12    | >30,000hrs |



■ T10/T10(canbus)/T15/1156/1157/3156/3157/T20S/T20D

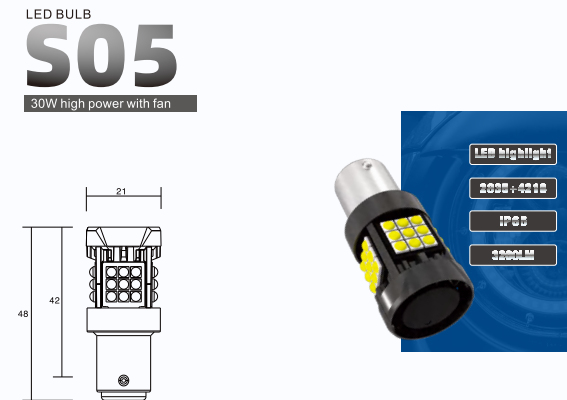

### Parameter


| Power | Voltage | Lumen(LM)/PCS | Water Proof Grade | LED Chip  | Material | Lifespan   |
|-------|---------|---------------|-------------------|-----------|----------|------------|
| 28W   | DC9-32V | 3400LM        | IP65              | 3030/2835 | ADC12    | >30,000hrs |



■1156/1157/3156/3157/T20S/T20D



S06 Series

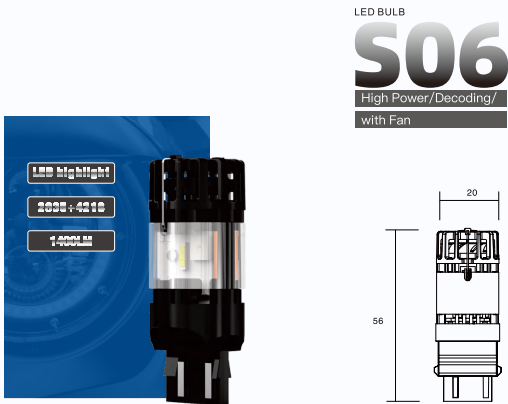

Parameter

| Power | Voltage  | Lumen(LM) / PCS | Water Proof Grade | LED Chip | Material | Lifespan   |
|-------|----------|-----------------|-------------------|----------|----------|------------|
| 32W   | DC11-18V | 2300LM          | IP65              | 1860     | AL6063   | >30,000hrs |



■ T10/T10(canbus)/1156/1157/3156/3157/T20S/T20D




EASDAR what you see is what you achieve

Automobile Laser Lighting


Special Models  
Of Automobile LED Lighting ■

There is no boundary between light and darkness

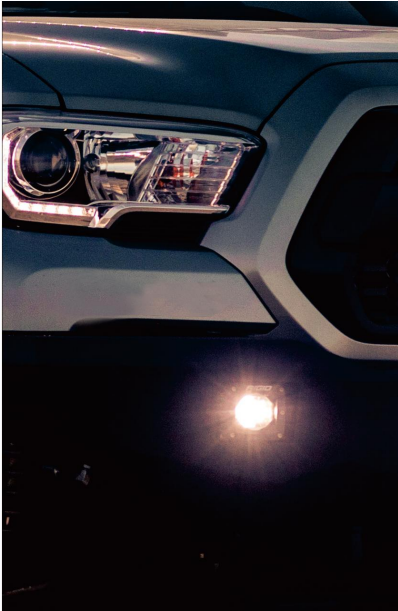

01

LED BULB  
**Automobile  
Laser Lighting**  
Long Distance

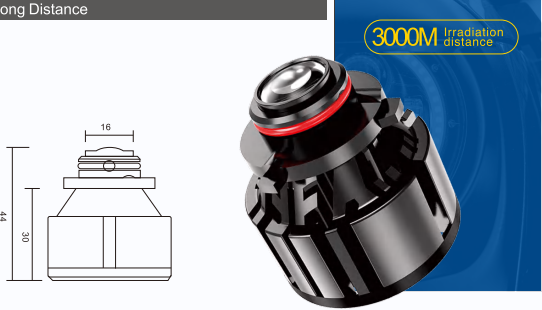

Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip           | Color(K) | Material               | Lifespan   |
|-------|---------|-----------|-------------------|--------------------|----------|------------------------|------------|
| 13W   | DC9-17V | 1000LM    | IP65              | Laser Light Source | 6500K    | Aviation Aluminum 6063 | >30,000hrs |



External Constant Current Driver to ensure 30000H Lifespan



The Central Luminous Intensity of a Fluorescence Crystal excited by a high-energy laser



Intelligent Cooling System With Dual Ball Fan



Intelligent Temperature System



The luminous intensity on the road is 140,000 /mm<sup>2</sup> and the light distance is up to 3,000 meters.

■ Model: H8/H9/H10/H11/9005/9006/9012


02

ST1 Intelligent Adjustable Lighting

There is no boundary between light and darkness



LED BULB  
**ST1**  
Adjusting Light Intelligently  
through Bluetooth.



Parameter

| Power | Voltage | Lumen(LM) | Water Proof Grade | LED Chip         | Color(K)    | Material               | Usage     |
|-------|---------|-----------|-------------------|------------------|-------------|------------------------|-----------|
| 28W   | DC9-32V | 4500LM    | IP65              | Custom-made Chip | 3000K-6500K | Aviation Aluminum 6063 | Fog Light |

